



HUNT *Simplicity*[®] ID Series Modular Dimming Systems for incandescent lamps 120V

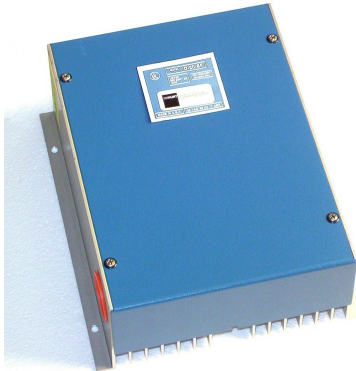

ID-20-F

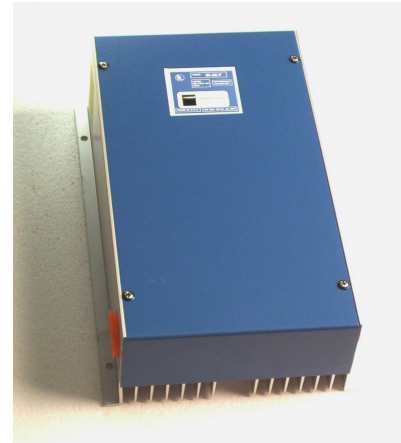

ID-30-F

Hunt Control Systems Inc.
200 Rome Court
Fort Collins CO 80524

Tel: (970) 484-9048
Fax: (970) 493-4125
hunt Dimming.com

Features:

- Continuous, flicker-free dimming to 0%
- Manually operates 2kW (ID-20-F) or 3kW (ID-30-F)
- Master units can control up to (15) ID-20-SF or ID-30-SF slave units from a single 4-wire, single-gang control
- Limited one-year warranty
- UL Listed

Specifications:

- Wall-mounted, convection-cooled
- 120V only
- Requires remote control switch, preset slide and rotary available, single pole or 3-way

For Use With:

Incandescent Lamps

Dimensions:

ID-20-F: 10"H x 8 1/2"W x 3 3/4"D


ID-30-F: 11 1/2"H x 8 1/2"W x 3 3/4" D

Dimming.


It's all we do.

Since 1960.

HUNT *Simplicity*[®] ID Series Modular Dimming Systems for use with incandescent lamps 120V

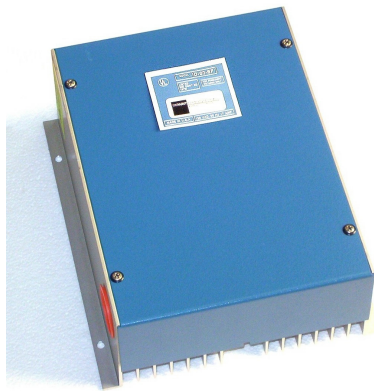

ID-20-SF

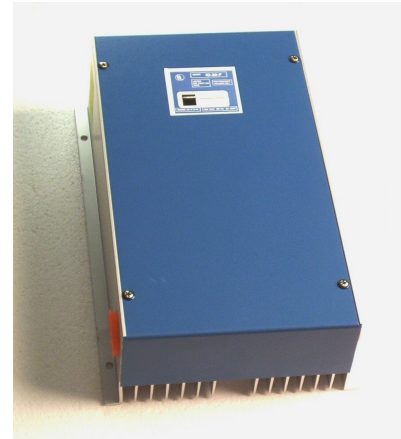

ID-30-SF

Features:

- Slave units for ID-20-F and ID-30-F master units
- Up to (15) slaves per each master unit, controlled from a single 4-wire, single gang control
- Continuous, flicker-free dimming to 0%
- Manually operates 2kW (ID-20-SF) or 3kW (ID-30-SF)
- Limited one-year warranty
- UL Listed

Specifications:

- Must be connected to ID-20-F or ID-30-F master unit
- Each master unit requires remote control switch, preset slide and rotary styles available, single pole or 3-way
- Wall-mounted, convection-cooled
- 120V only

For Use With:

Incandescent Lamps

Dimensions:

ID-20-SF: 10"H x 8 1/2"W x 3 3/4"D

ID-30-SF: 11 1/2"H x 8 1/2"W x 3 3/4" D

Hunt Control Systems Inc.
200 Rome Court
Fort Collins CO 80524

Tel: (970) 484-9048

Fax: (970) 493-4125

huntdimming.com

Dimming.

It's all we do.

Since 1960.

HUNT *Simplicity*[®] PS-IFC-1 Series Controls for ID and FD Series Modular Systems 120V and 277V



PS-IFC-1
PS-IFC-1-3W

Hunt Control Systems Inc.
200 Rome Court
Fort Collins CO 80524

Tel: (970) 484-9048
Fax: (970) 493-4125
hunteddimming.com

Features:

- Preset slide control – strap mount.
- Easy-to-operate, smooth-sliding linear control and switch.
- Available in single-pole or 3-way.
- Uses standard designer-style faceplate, included in box.
- Fits in any standard 2" deep single gang switchbox.
- Limited one-year warranty.
- Available in Ivory, White (standard colors), Brown, Black or Gray (custom colors).
- Rated for 120/277V applications.

Note:


All 3-way controls require a standard 3-way toggle switch to complete the circuit.

Dimming.


It's all we do.
Since 1960.

**Wiring Diagram
For HUNT *Simplicity*[®]
PS-IFC-1, AIFC-1 and PS-IFC-3W-1
Controls for ID and FD Series**

Single Pole Wiring

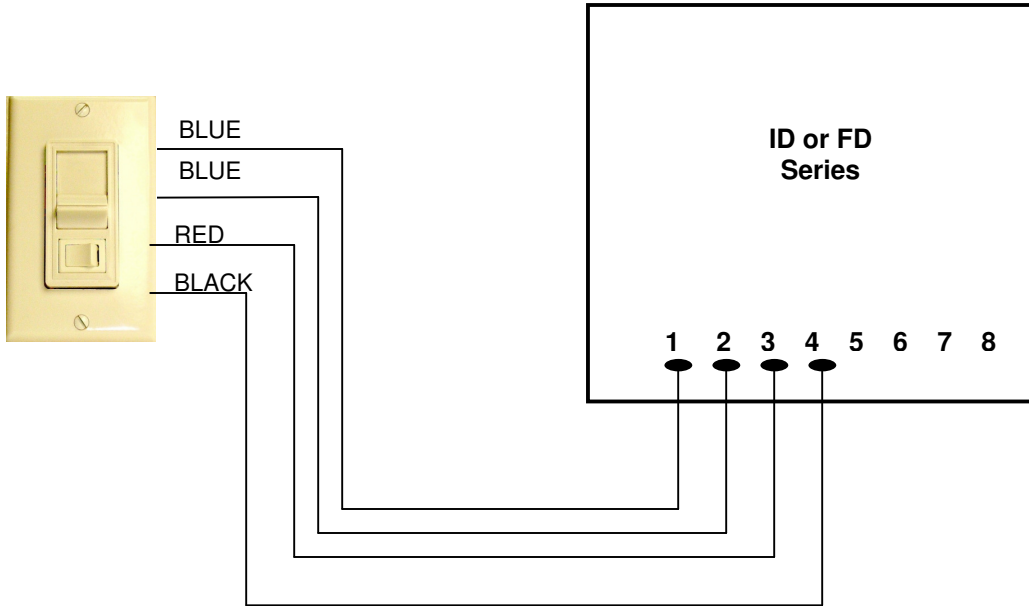

Three Way Wiring

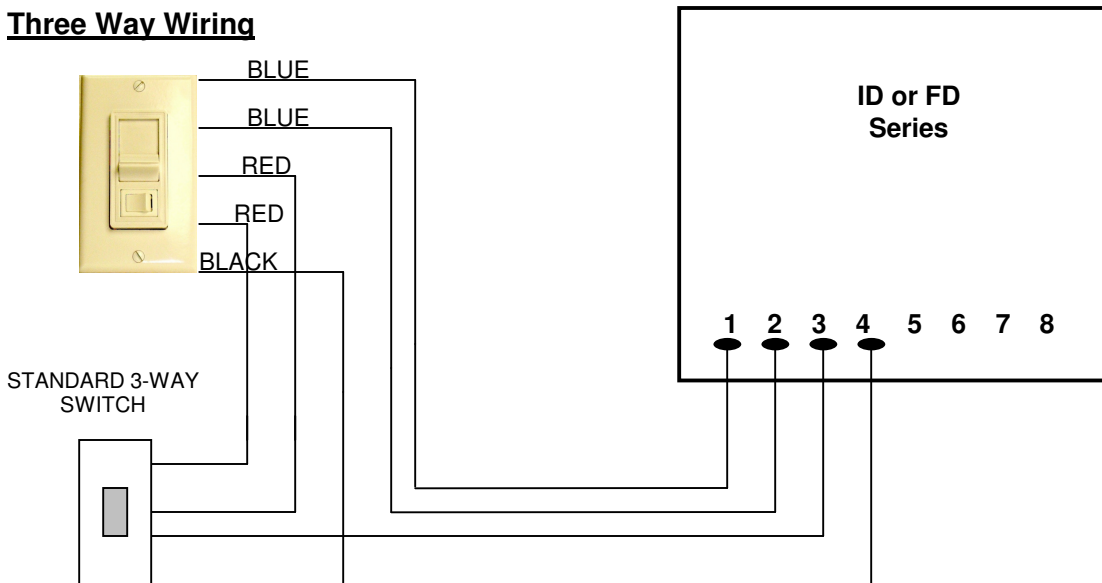

Hunt Control Systems, Inc.
200 Rome Court
Fort Collins, CO 80524
U.S.A
Ph: (970) 484-9048
Fax: (970) 493-4125
www.hunt Dimming.com