


SIMPLICITY™ SERIES PRE-WIRED DIMMING PANELS DIMENSIONAL DATA


RECESSED MOUNTED UNITS WITHOUT COVER

MODEL	MOUNTING	BOX SIZE	COVER SIZE	MAX. # OF DIMMERS
SPR-9	RECESSED	24" w x 36" h x 6" d	26" w x 38" h	9
SPR-16	RECESSED	28" w x 40" h x 6" d	30" w x 42" h	16
SPR-25	RECESSED	36" w x 60" h x 6" d	38" w x 62" h	25
SPR-36	RECESSED	36" w x 60" h x 6" d	38" w x 62" h	36

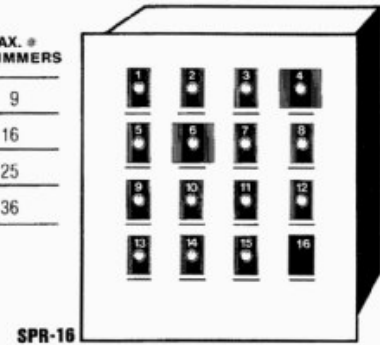

WITH HINGED, LOCKABLE COVER

SPRL-9	RECESSED	24" w x 36" h x 6" d	26" w x 38" h	9
SPRL-16	RECESSED	28" w x 40" h x 6" d	30" w x 42" h	16
SPRL-25	RECESSED	36" w x 60" h x 6" d	38" w x 62" h	25
SPRL-36	RECESSED	36" w x 60" h x 6" d	38" w x 62" h	36

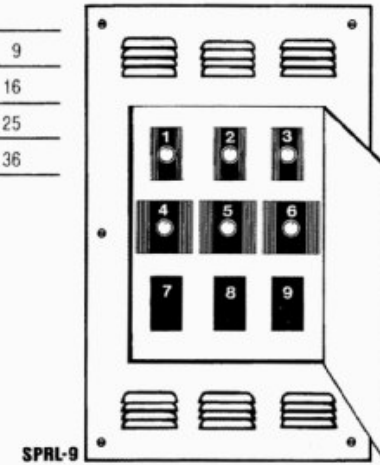


SURFACE MOUNTED UNITS WITHOUT COVER

SPS-9	SURFACE	24" w x 36" h x 6" d	24" w x 36" h	9
SPS-16	SURFACE	28" w x 40" h x 6" d	28" w x 40" h	16
SPS-25	SURFACE	36" w x 60" h x 6" d	36" w x 60" h	25
SPS-36	SURFACE	36" w x 60" h x 6" d	36" w x 60" h	36

WITH HINGED, LOCKABLE COVER

SPSL-9	SURFACE	24" w x 36" h x 6" d	24" w x 36" h	9
SPSL-16	SURFACE	28" w x 40" h x 6" d	28" w x 40" h	16
SPSL-25	SURFACE	36" w x 60" h x 6" d	36" w x 60" h	25
SPSL-36	SURFACE	36" w x 60" h x 6" d	36" w x 60" h	36

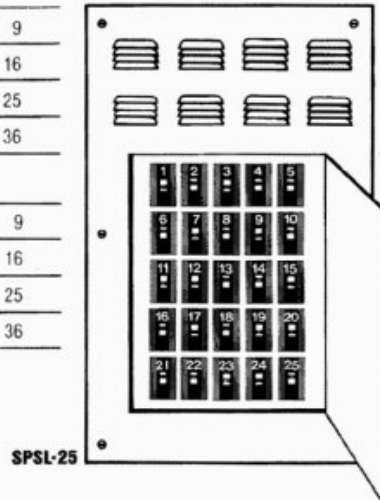


Simplicity™ Series Pre-Wired Dimming Panels


HUNT's Simplicity™ Series pre-wired dimmer panels are factory pre-wired, simple-to-install, surface-mounted or recessed units. Cabinet styles are available to accommodate 9, 16, 25 or 36 UL-listed dimmers with a maximum of 50-KW load. These panels permit any combination of load types and dimmer models up to 2000 watts per dimmer, controlling up to 36 circuits. The panels control fluorescent, incandescent, fan motor, neon or non-dimmed loads. When the maximum number of dimmers is not required, the vacant spaces are covered by faceplates.

Features include:

- Dimmers prewired to terminal blocks
- Thermostatically controlled fans
- Air cooling vents
- Engraved identification plates
- Hinged door on recessed unit
- UL recognized or listed components
- Rotary or Slide dimmers
- NEMA enclosure
- 9, 16, 25 or 36 dimmers

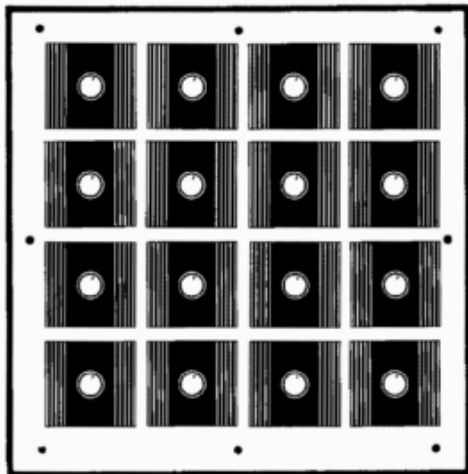**Available options include:**

- Hinged door on surface-mounted unit
- Locking doors
- Circuit breakers

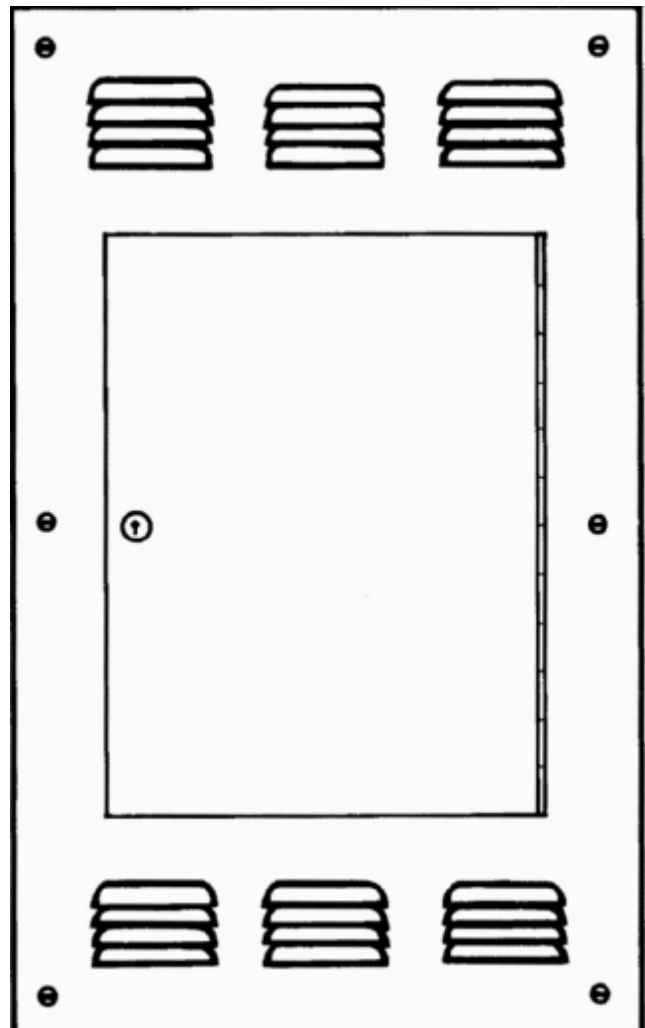**HUNT Control Systems, Inc.**200 Rome Court
Fort Collins, CO 80524
U.S.A.

Ph: (970) 484-9048

Fax: (970) 493-4125

www.hunt Dimming.com